

Clear Frost


Performance Data

Total Solar Energy Reduction	33%
Solar Energy Reflected	19%
Solar Energy Absorbed	22%
Solar Energy Transmittance	59%
Visible Light Transmittance	65%
Visible Light Reflected	25%
Ultra Violet Light Reflected	99%
Shading Coefficient	.78
Solar Heat Gain Coeff. (g Value)	.67
Emissivity	.87
Winter U-Factor (W/m ² °C)	
Glare Reduction	28%



Performance Guide

Solar Heat Rejection	☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
Glare Reduction	☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
UV Reduction	☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
Fade Reduction	☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
Safety & Security	☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
One-Way Privacy	☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
Two-Way Privacy	☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
Scratch Resistance Coating	No
Warranty Period	12/5 Years
Application	Internal/External

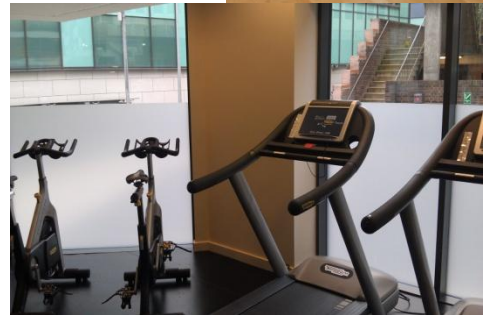

Key:

Excellent ☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️ Some Benefit ☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
 N/A ☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️

Window Film Description

An excellent privacy film giving two-way privacy, but still allow the natural light in from the outside keeping the room light and airy. Also ideal for glass partitions and can be cut with a company logo or graphic design.

Acid etch appearance.

12 year internal and 5 year extranal warranty against peeling, discolouration, bubbling and cracking.

Applications

Ideal for internal and external glass applications including commercial, residential and industrial applications for privacy.