

## DC 15

### Performance Data


Total Solar Energy Reduction	80%
Solar Energy Reflected	52%
Solar Energy Absorbed	39%
Solar Energy Transmittance	10%
Visible Light Transmittance	12%
Visible Light Reflected	25%
Ultra Violet Light Reflected	99%
Shading Coefficient	.25
Solar Heat Gain Coeff. (g Value)	.22
Emissivity	.74
Winter U-Factor (W/m <sup>2</sup> °C)	2.67
Glare Reduction	86%

### Performance Guide

Solar Heat Rejection	☀️☀️☀️☀️☀️☀️☀️☀️
Glare Reduction	☀️☀️☀️☀️☀️☀️☀️☀️
UV Reduction	☀️☀️☀️☀️☀️☀️☀️☀️
Fade Reduction	☀️☀️☀️☀️☀️☀️☀️☀️
Safety & Security	☀️☀️☀️☀️☀️☀️☀️☀️
One-Way Privacy	☀️☀️☀️☀️☀️☀️☀️☀️
Two-Way Privacy	☀️☀️☀️☀️☀️☀️☀️☀️
Scratch Resistance Coating	Yes
Warranty Period	12 Years
Application	Internal

Key:

Excellent ☀️☀️☀️☀️☀️☀️☀️☀️    Some Benefit ☀️☀️☀️☀️☀️☀️☀️☀️  
 N/A ☀️☀️☀️☀️☀️☀️☀️☀️

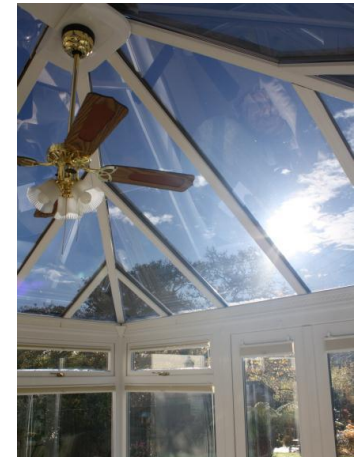

### Window Film Description

An excellent solar reflective metal sputtered window film with a warm neutral low internal reflectance, but allows the natural light to enter, for a luminous interior, while affording a comfortable and temperate environment.

This film from the outside view gives a modern mirror finish with a low reflective internal view looking out.

12 year warranty against peeling, discolouration, bubbling and cracking.

### Applications

Ideal for most internal glass applications including commercial, residential and industrial applications. A popular film for schools, commercial buildings, conservatory roof glass and daytime privacy.