

# Graffitigard


## Performance Data

Total Solar Energy Reduction	17%
Solar Energy Reflected	8%
Solar Energy Absorbed	14%
Solar Energy Transmittance	78%
Visible Light Transmittance	89%
Visible Light Reflected	9%
Ultra Violet Light Reflected	99%
Shading Coefficient	.95
Solar Heat Gain Coeff. (g Value)	.83
Emissivity	.84
Winter U-Factor (W/m <sup>2</sup> °C)	
Glare Reduction	2%

## Performance Guide

Solar Heat Rejection	☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
Glare Reduction	☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
UV Reduction	☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
Fade Reduction	☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
Safety & Security	☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
One-Way Privacy	☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
Two-Way Privacy	☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
Scratch Resistance Coating	Yes
Warranty Period	6 Years
Application	External

Key:  
 Excellent ☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️ Some Benefit ☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️  
 N/A ☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️

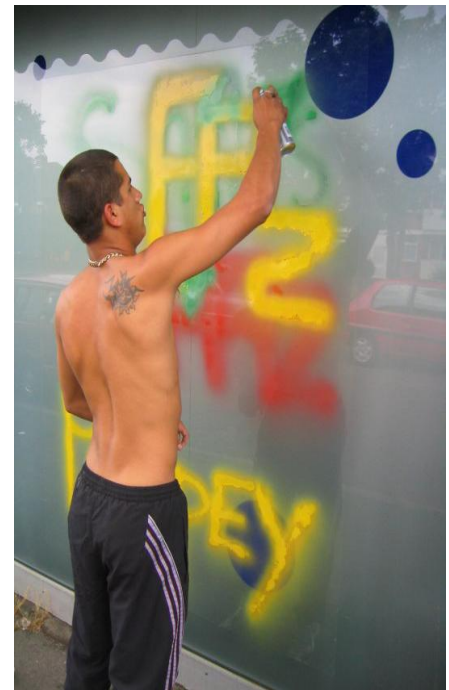

## Window Film Description

This 2 ply window film will help protect glass from spray paints, scratches and gouging caused by vandals or accidents

Optically clear appearance.

## Carbon Negative

Carbon Negative window film means that the environmental impact required to manufacture, distribute, install and dispose of at the end of the films life cycle, is less than the carbon reduction achieved as a result of the window films installation.

## Applications

Ideal for retail, commercial, residential and industrial applications to protect glass from accidental or intentional damage.