

Clear Frost


Performance Data

| | |
|---------------------------------------|-----|
| Total Solar Energy Reduction | 33% |
| Solar Energy Reflected | 19% |
| Solar Energy Absorbed | 22% |
| Solar Energy Transmittance | 59% |
| Visible Light Transmittance | 65% |
| Visible Light Reflected | 25% |
| Ultra Violet Light Reflected | 99% |
| Shading Coefficient | .78 |
| Solar Heat Gain Coeff. (g Value) | .67 |
| Emissivity | .87 |
| Winter U-Factor (W/m ² °C) | |
| Glare Reduction | 28% |

Performance Guide

| | |
|----------------------------|----------------------|
| Solar Heat Rejection | ☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️ |
| Glare Reduction | ☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️ |
| UV Reduction | ☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️ |
| Fade Reduction | ☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️ |
| Safety & Security | ☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️ |
| One-Way Privacy | ☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️ |
| Two-Way Privacy | ☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️ |
| Scratch Resistance Coating | No |
| Warranty Period | 10 Years |
| Application | Internal |

Key:
 Excellent ☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️ Some Benefit ☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
 N/A ☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️

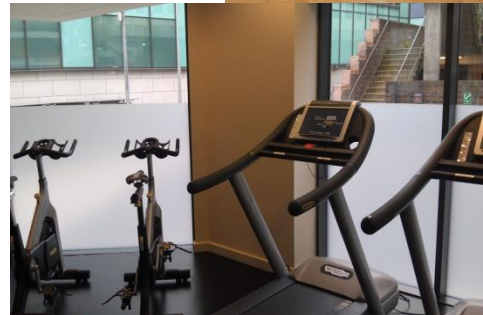

Window Film Description

An excellent privacy film giving two-way privacy, day or nighttime whilst still allow the natural light in from the outside keeping the room light and airy.

Acid etch / sandblasted appearance.

10 year internal warranty against peeling, discolouration, bubbling and cracking.

Applications

Ideal for internal glass applications including commercial, residential and industrial applications for privacy.