

Opal Frost


Performance Data

Total Solar Energy Reduction	
Solar Energy Reflected	
Solar Energy Absorbed	
Solar Energy Transmittance	
Visible Light Transmittance	
Visible Light Reflected	
Ultra Violet Light Reflected	99%
Shading Coefficient	
Solar Heat Gain Coeff. (g Value)	
Emissivity	
Winter U-Factor (W/m ² °C)	
Glare Reduction	28%



Performance Guide

Solar Heat Rejection	☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
Glare Reduction	☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
UV Reduction	☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
Fade Reduction	☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
Safety & Security	☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
One-Way Privacy	☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
Two-Way Privacy	☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
Scratch Resistance Coating	No
Warranty Period	7 Years / 5 years
Application	Internal/External

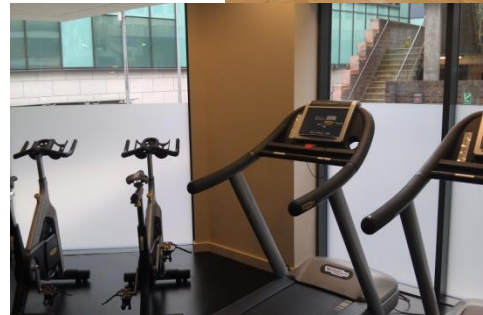

Key:

Excellent ☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️ Some Benefit ☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
 N/A ☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️

Window Film Description

An excellent privacy film giving two-way privacy, but still allow the natural light in from the outside keeping the room light and airy. Also ideal for glass partitions and can be cut with a company logo or graphic design.

Acid etch appearance.

Warranty against peeling, discolouration, bubbling and cracking.

Applications

Ideal for internal and external glass applications including commercial, residential and industrial applications for privacy.